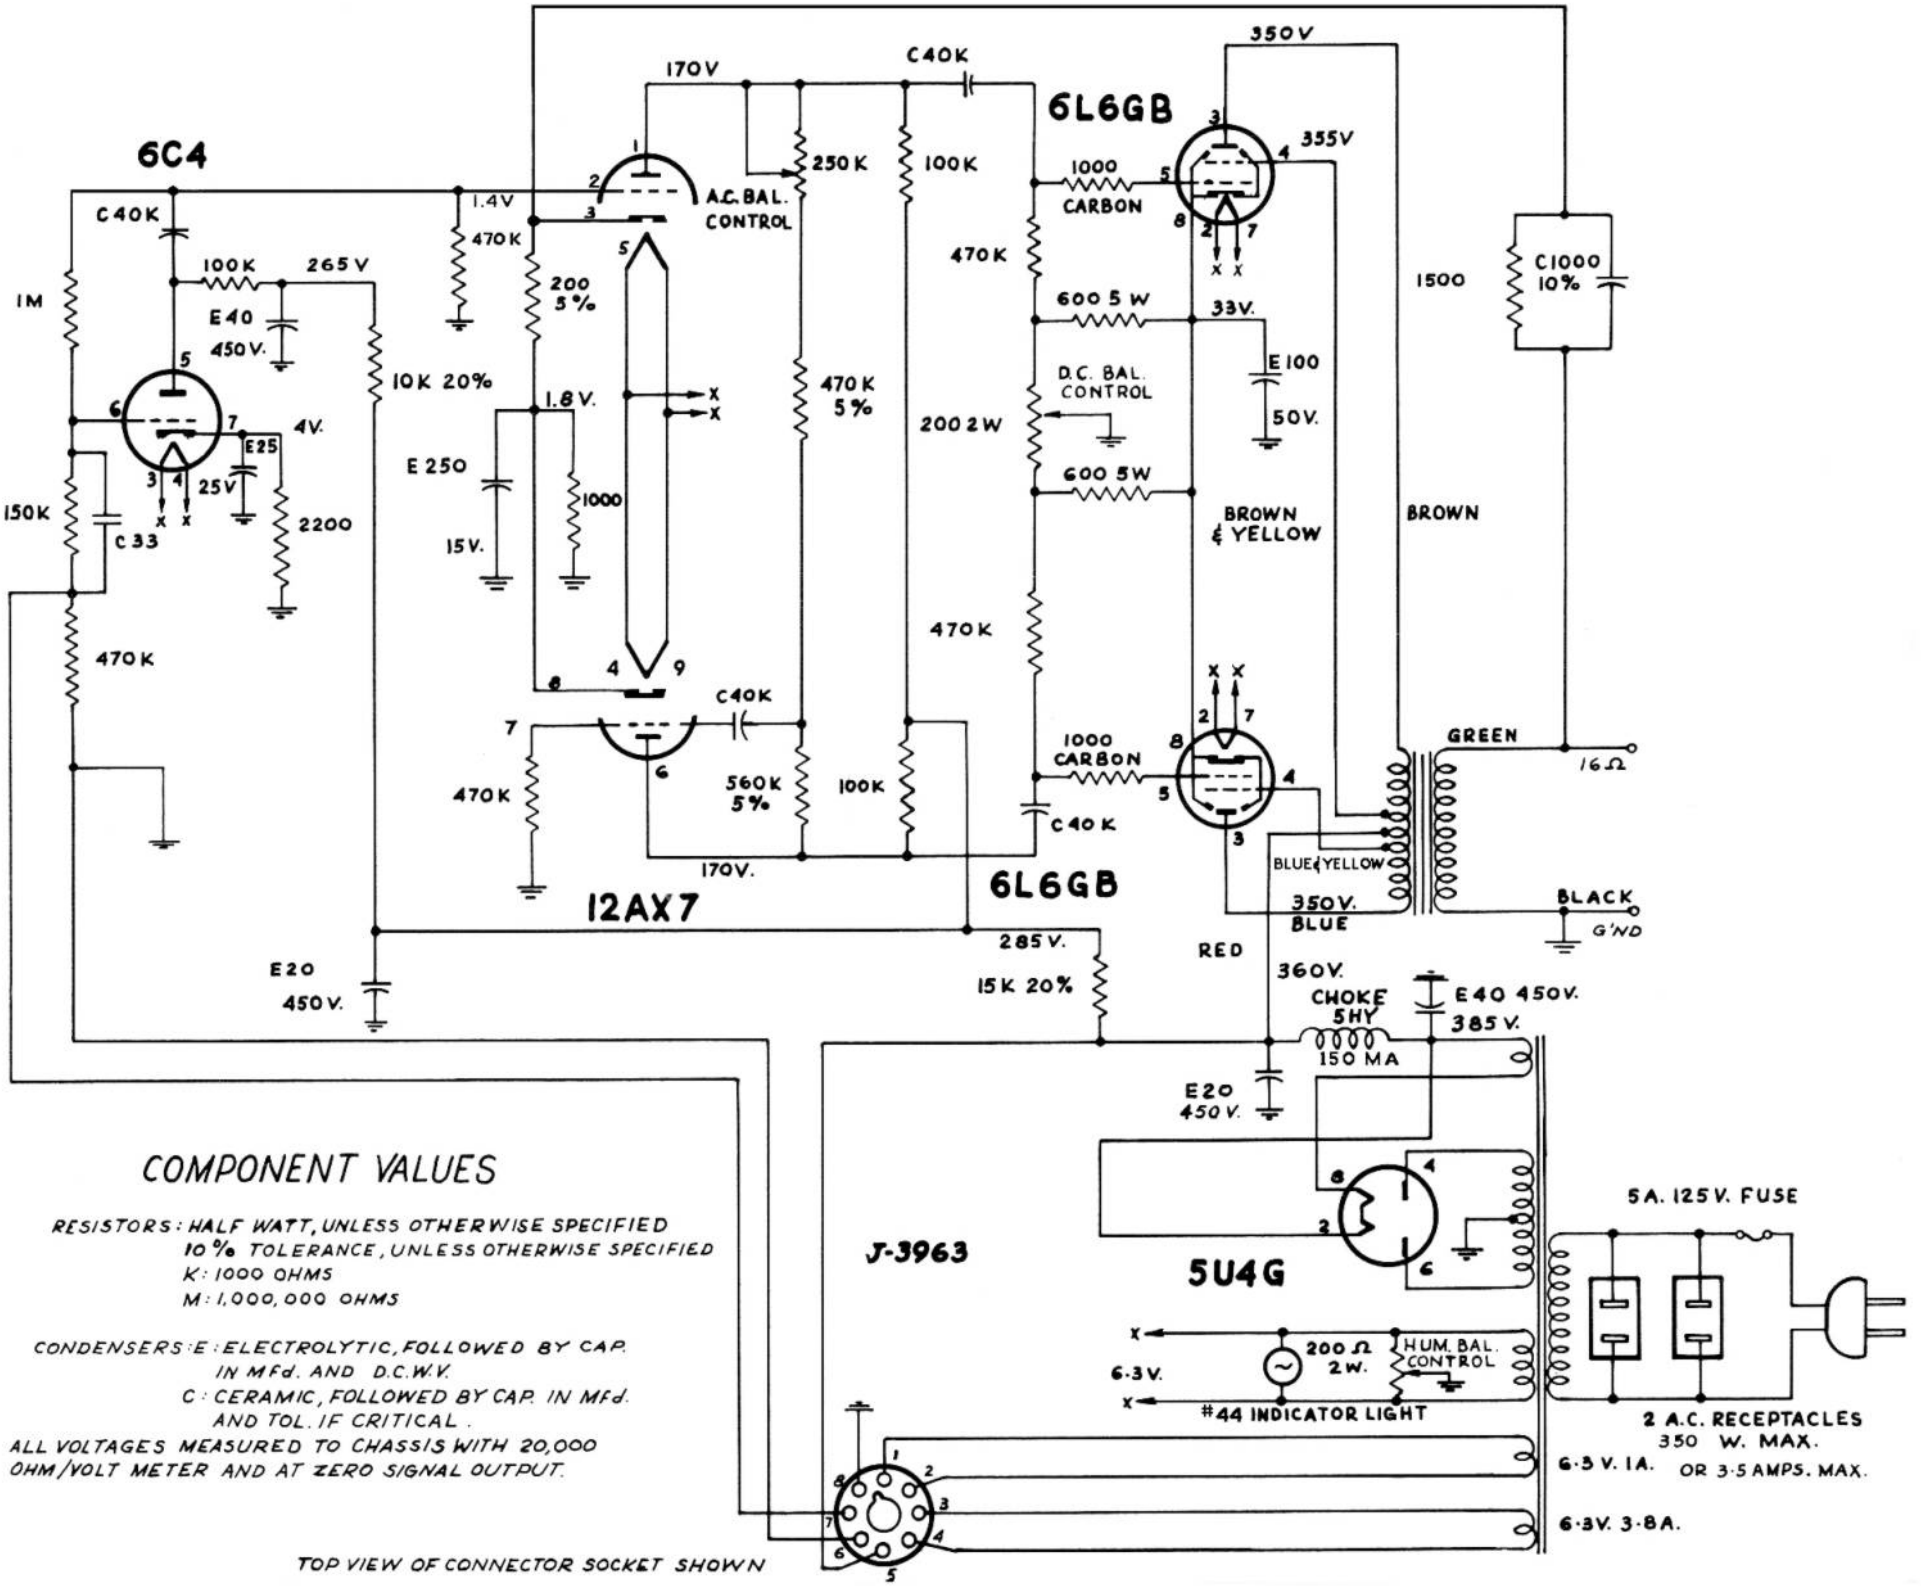

COMPONENT VALUES

RESISTORS: HALF WATT, UNLESS OTHERWISE SPECIFIED
10% TOLERANCE, UNLESS OTHERWISE SPECIFIED
K: 1000 OHMS
M: 1,000,000 OHMS

CONDENSERS: E: ELECTROLYTIC, FOLLOWED BY CAP. IN Mfd. AND D.C.W.V.
C: CERAMIC, FOLLOWED BY CAP. IN Mfd. AND TOL. IF CRITICAL.

ALL VOLTAGES MEASURED TO CHASSIS WITH 20,000 OHM/VOLT METER AND AT ZERO SIGNAL OUTPUT.

Electrohome 6L6GB Slave Amplifier Version 2 (used on many models)