


- NOTES:
1. FOR ALL VOLTAGE AND CURRENT MEASUREMENTS, LINE = 117 V.A.C.
 2. DC VOLTAGE MEASURED WITH VTVM TO CHASSIS WITH NO SIGNAL INPUT.
 3. REAR SECTION OF DUAL CONTROLS USED IN LEFT CHANNEL.
 4. CAPACITORS C34 AND C35 OMITTED IN SETS SERIALIZED 10001A TO 10000A

Amplificador estereofónico "The Fisher" X-100-A.

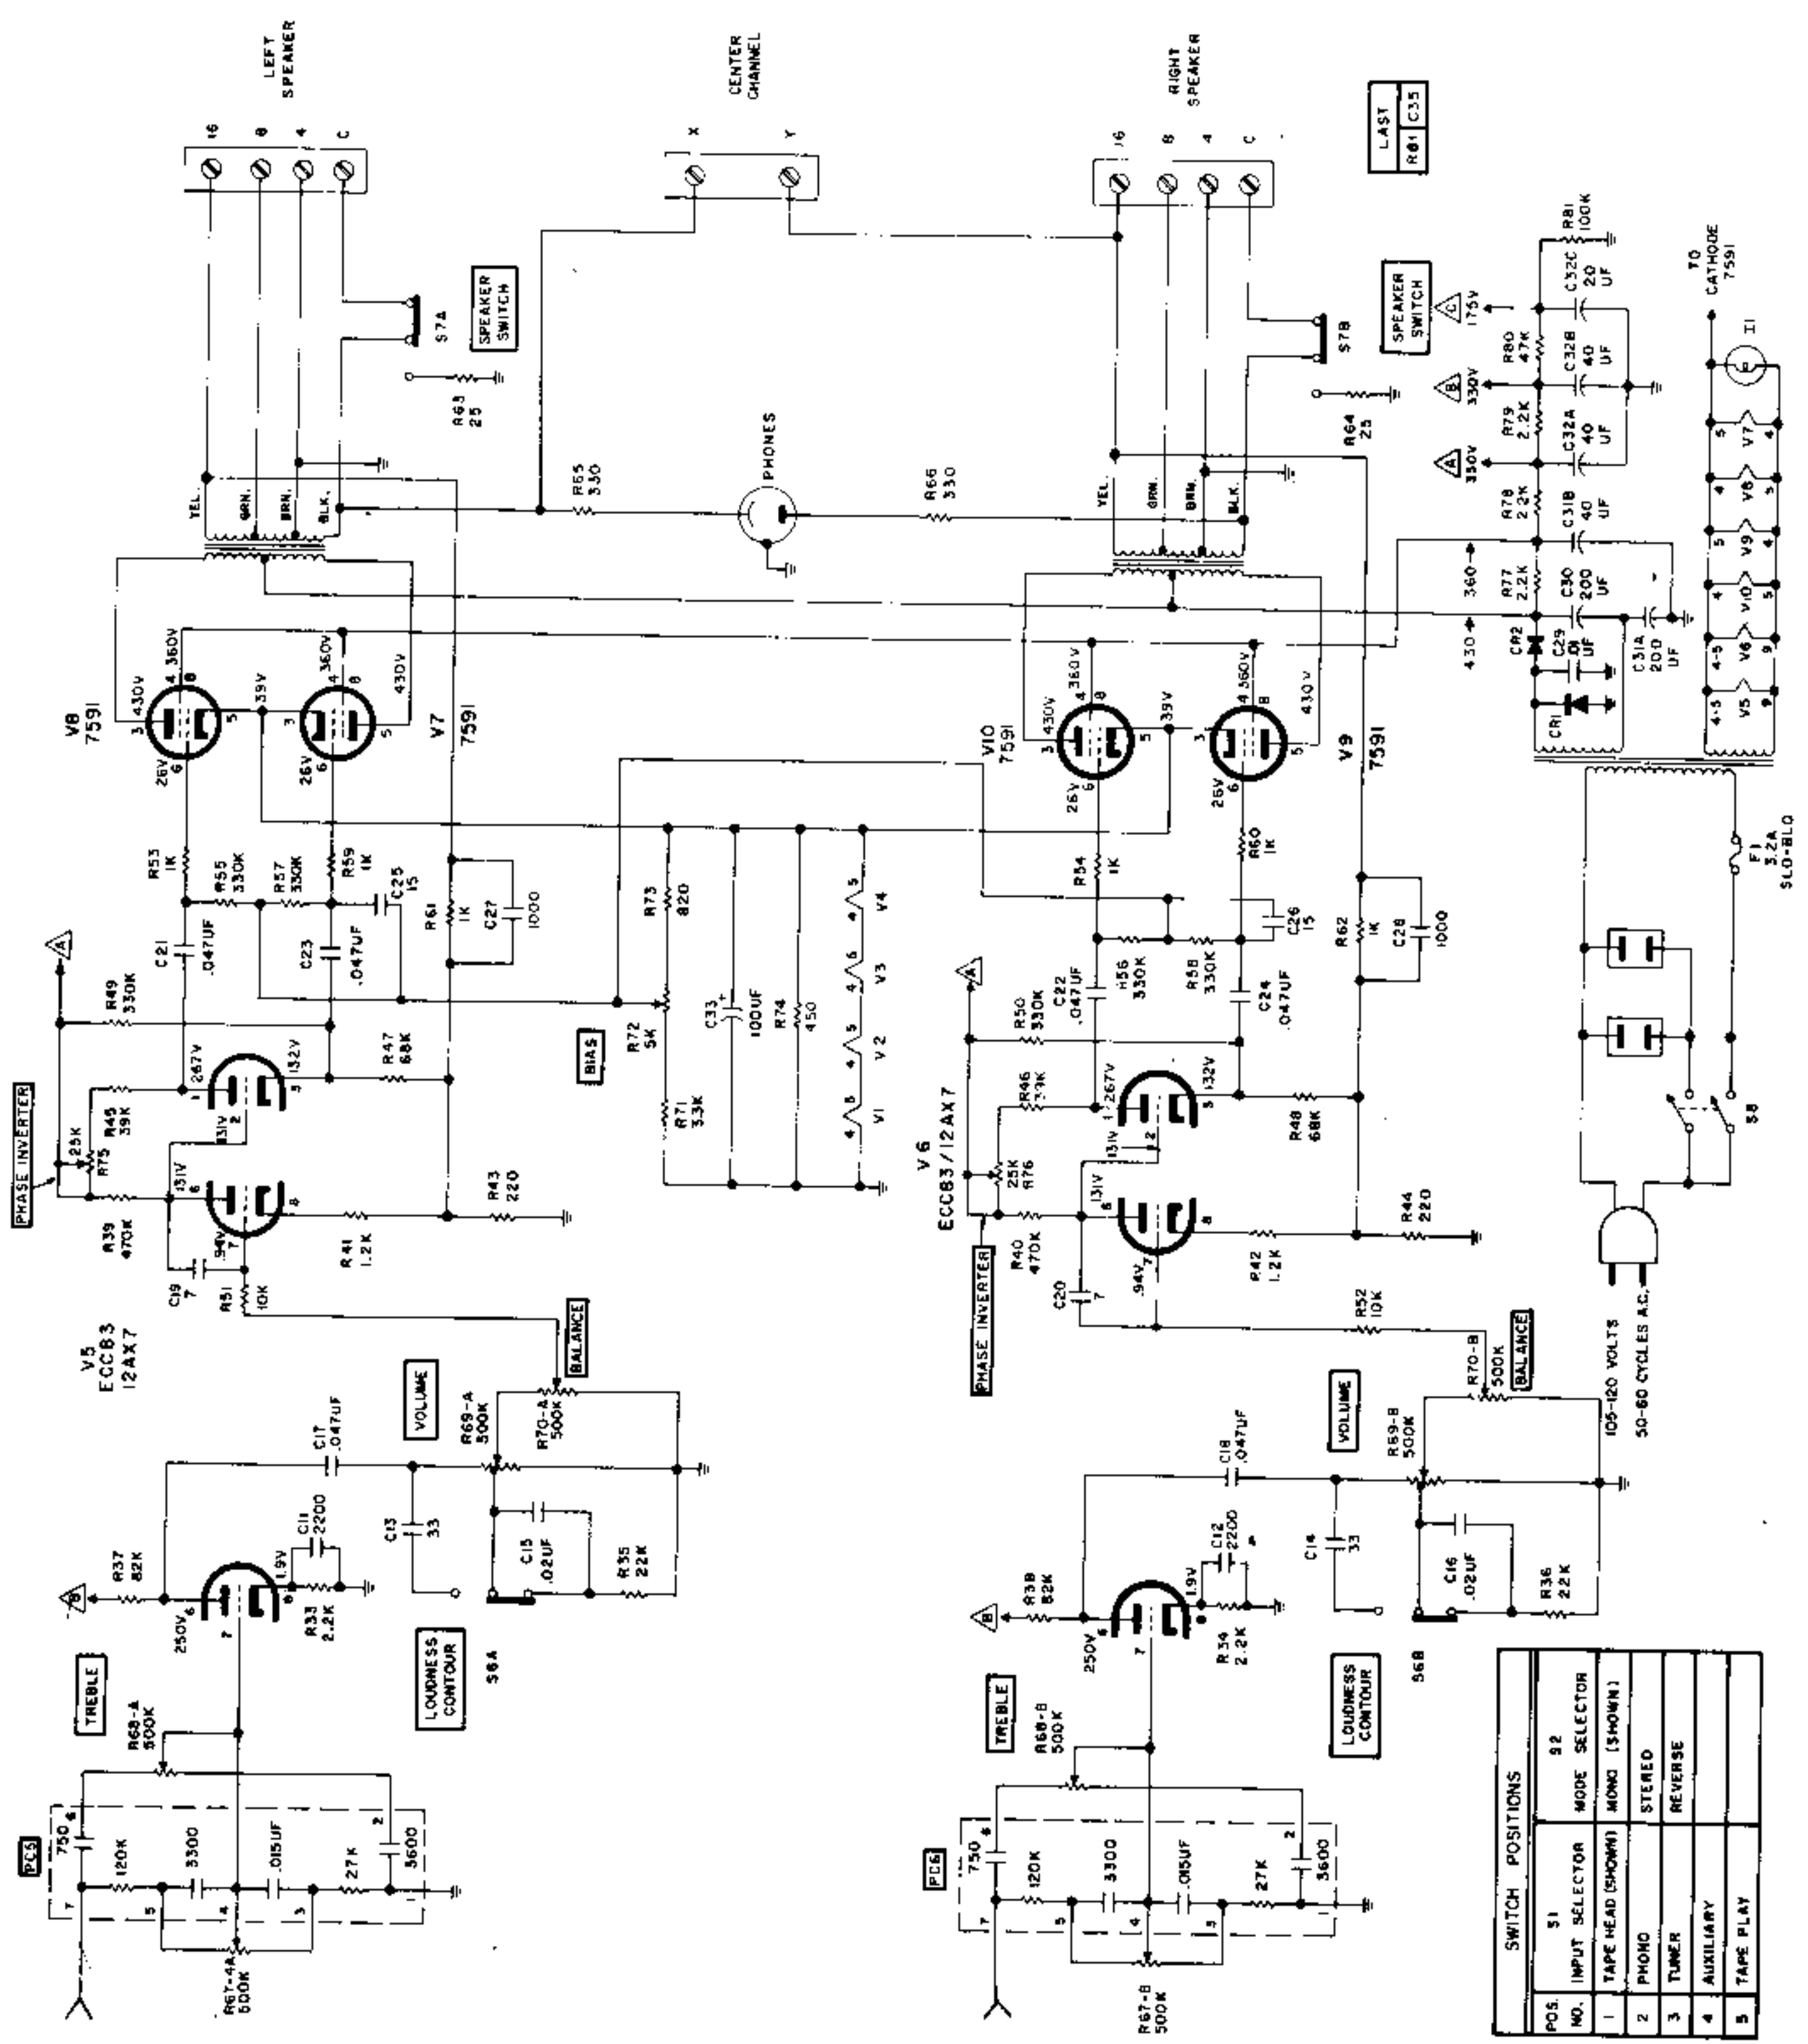

SWITCH POSITIONS	
POS. NO.	52
1	INPUT SELECTOR
2	TAPE HEAD (SHOWN)
3	PHONO
4	AUXILIARY
5	TAPE PLAY
6	MODE SELECTOR
7	MONO (SHOWN)
8	STEREO
9	REVERSE

LAST
R01 C35

TO CATHODE
7591

F1
3.2A
SLO-BLO

105-120 VOLTS
50-60 CYCLES A.C.

BALANCE

VOLUME

56B

56A

PC6

PC5

PC5

PC6