


FISHER MPX-10

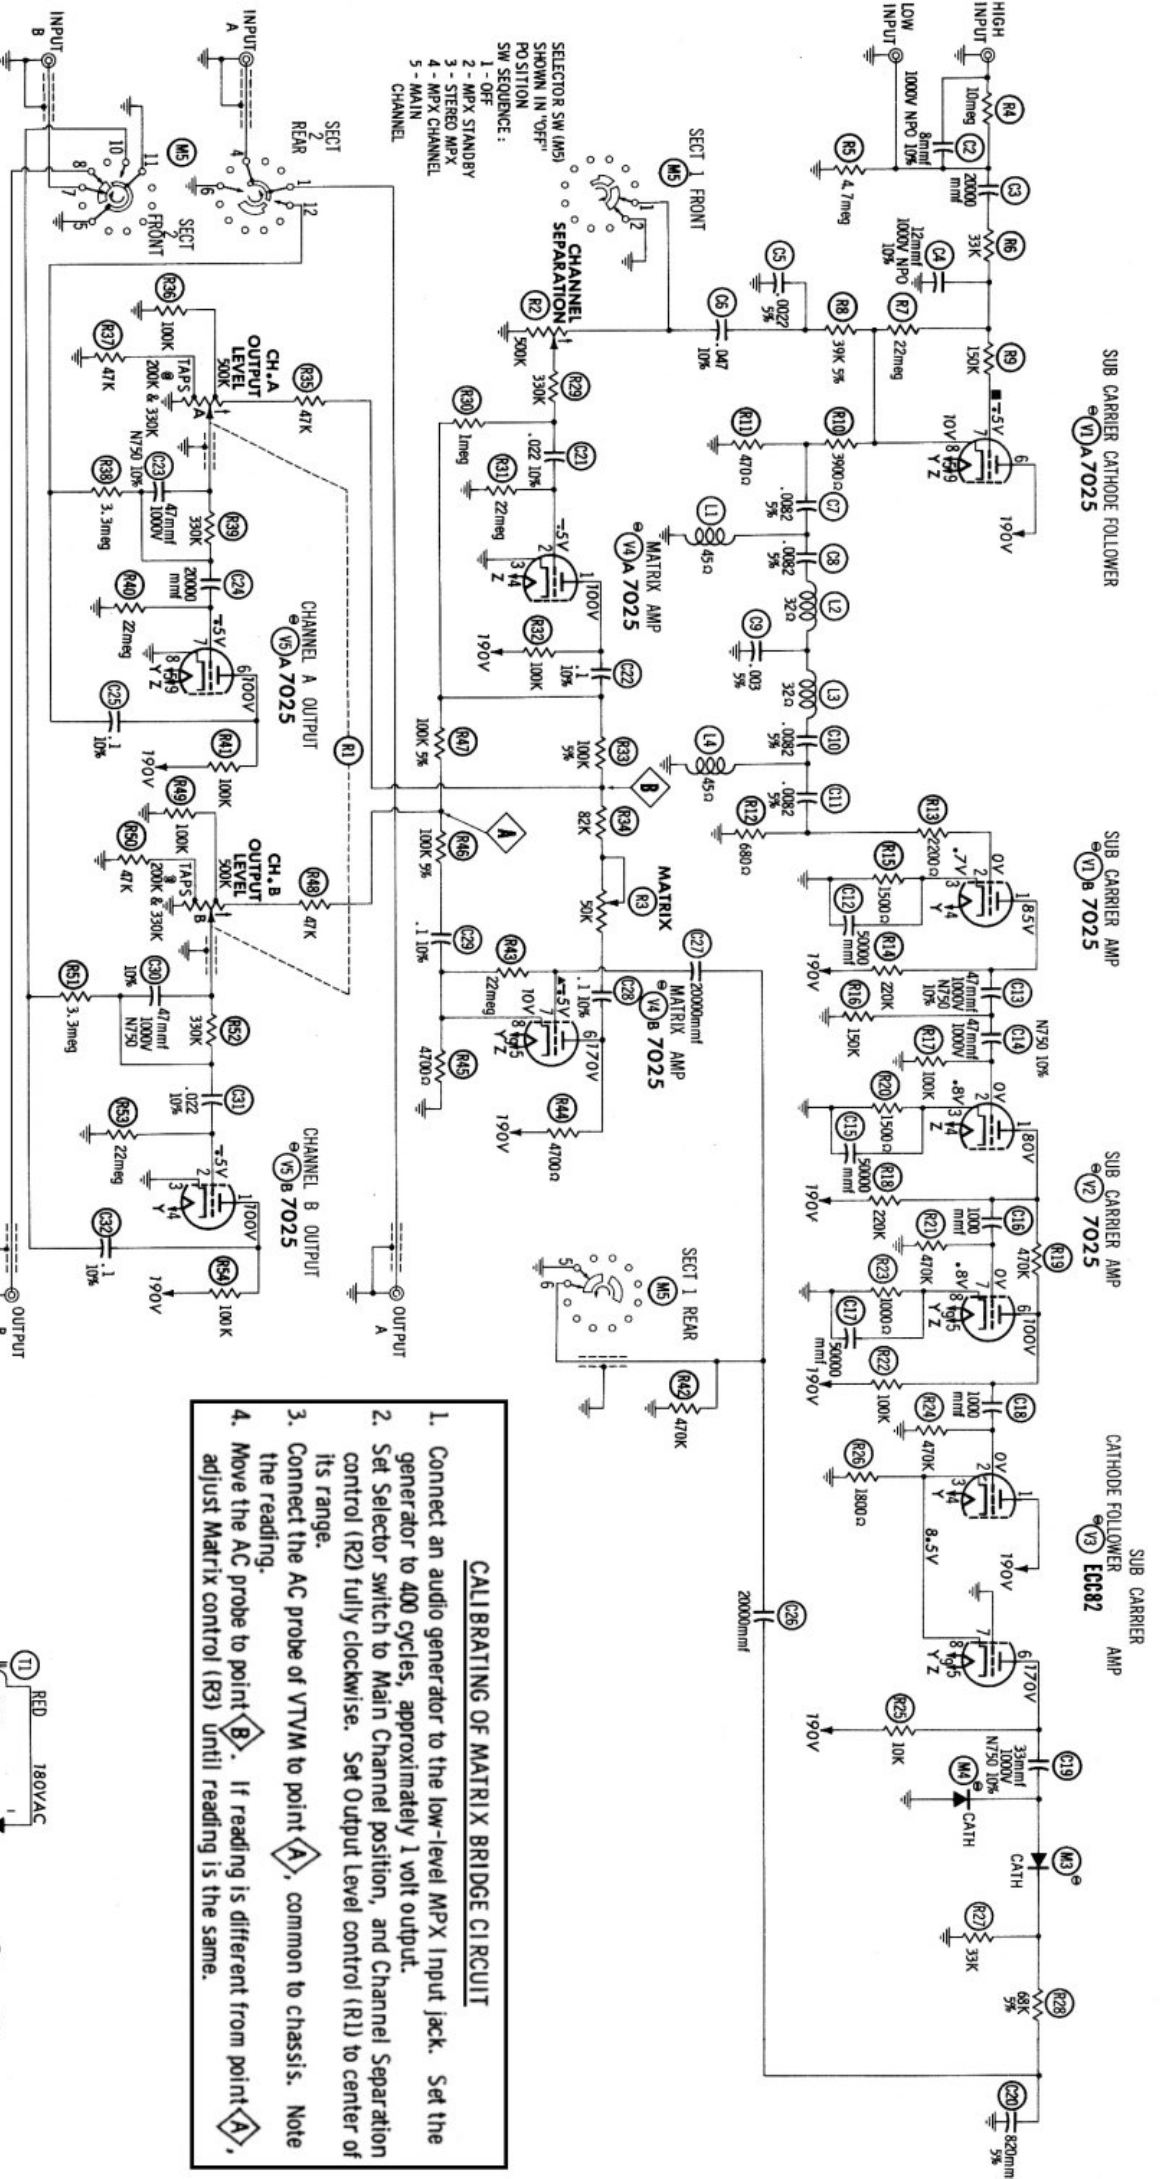

SUB CARRIER FOLLOWER
①1A 7025

SUB CARRIER AMP
①1B 7025

SUB CARRIER AMP
①2 7025

SUB CARRIER
CATHODE FOLLOWER
AMP
①3 ECC82

CALIBRATING OF MATRIX BRIDGE CIRCUIT

1. Connect an audio generator to the low-level MPX Input jack. Set the generator to 400 cycles, approximately 1 volt output.
2. Set Selector switch to Main Channel position, and Channel Separation control (R2) fully clockwise. Set Output Level control (R1) to center of its range.
3. Connect the AC probe of VTVM to point **Δ**, common to chassis. Note the reading.
4. Move the AC probe to point **Δ**. If reading is different from point **Δ**, adjust Matrix control (R3) until reading is the same.

