


KENWOOD

STEREO INTEGRATED AMPLIFIER

KA-3055

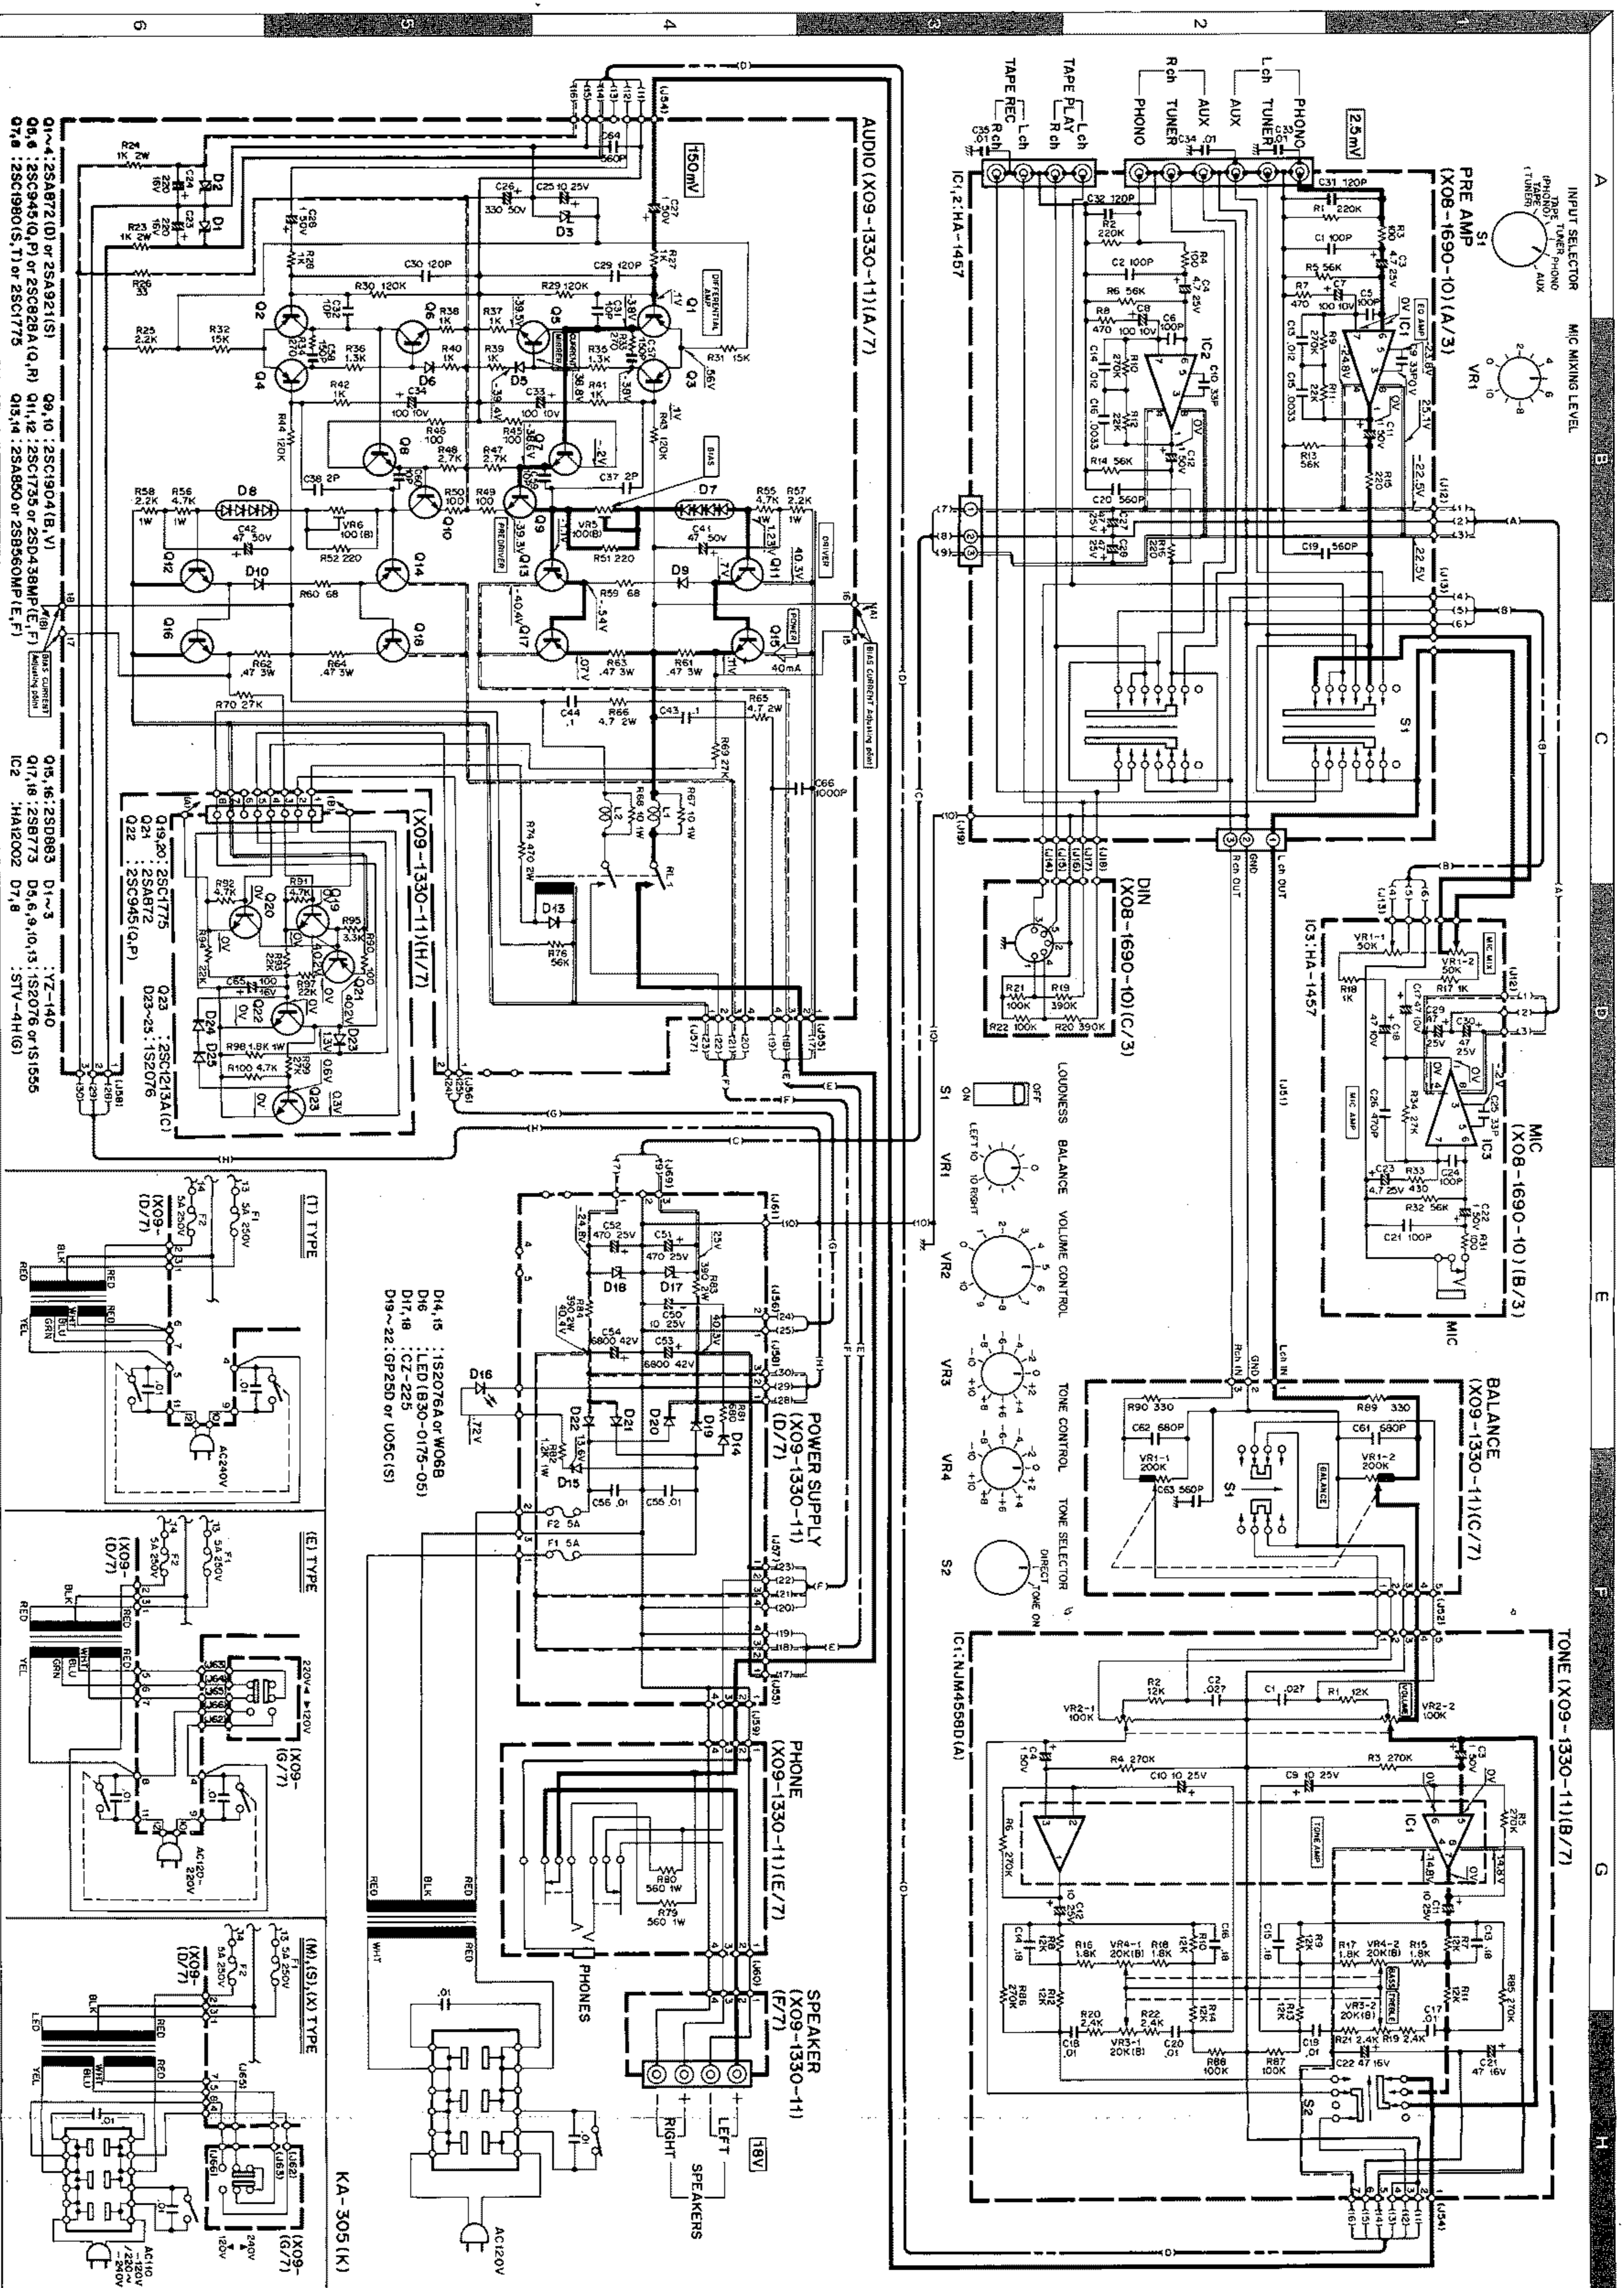

SPECIFICATIONS

POWER OUTPUT

40 watts* per channel minimum RMS, both channels driven, at 8 ohms from 20 Hz to 20,000 Hz with no more than 0.05% total harmonic distortion.

Both Channels Driven: 44 + 44 watts 8 ohms at 1,000 Hz; 50 + 50 watts 4 ohms at 1,000 Hz

Total Harmonic Distortion: 0.03% at rated power into 8 ohms (1 kHz); 0.05% at rated power into 3 ohms (20 Hz ~ 20 kHz); 0.05% at 1/2 rated power into 8 ohms (1 kHz)

PHONO Input to SPEAKER Output: 0.03% at rated power with VOLUME -20 dB; 0.03% at rated power into 8 ohms (60 Hz ~ 7 kHz - 4:1)

Damping Factor: 40; 5 Hz to 40,000 Hz at 0.03% T.H.D.; 3 Hz to 100 Hz -3 dB

Power Bandwidth: 5 Hz to 100 Hz -3 dB; Accepts 4 ohms to 16 ohms

Frequency Response: 2.5 mV/30 kohms; 150 mV/20 kohms; 150 mV/30 kohms; 2.5 mV/50 kohms

Phono: 77 dB for 2.5 mV input; 83 dB for 5.0 mV input; 89 dB for 10 mV input; 95 dB for 150 mV input; 73 dB for 2.5 mV input; 250 mV (RMS), T.H.D. 0.03% at 1,000 Hz

AUX: 30 mV/75 kohms; RIAA standard curve +0.4 dB (30 Hz to 15,000 Hz)

Tuner, AUX, Tape: 110 dB at 100 Hz; 110 dB at 10,000 Hz; 8 dB at 100 Hz

Mic: 110 dB at 100 Hz; 110 dB at 10,000 Hz; 8 dB at 100 Hz

Maximum Input Level for Phono: 150 mV/220 ohms

Output Level/Impedance: 30 mV/75 kohms

Tape REC (PH): 150 mV/220 ohms

(DIN): 150 mV/220 ohms

Frequency Response for Phono: 110 dB at 100 Hz; 110 dB at 10,000 Hz; 8 dB at 100 Hz

Tone Control: 110 dB at 100 Hz; 110 dB at 10,000 Hz; 8 dB at 100 Hz

Balance: 110 dB at 100 Hz; 110 dB at 10,000 Hz; 8 dB at 100 Hz

Loudness Control: 110 dB at 100 Hz; 110 dB at 10,000 Hz; 8 dB at 100 Hz

44 - 30 dB VOLUME Level

GENERAL: 320 watts at full power; Switched 2, Unswitched 1; 400 mm (15.75"); 110 mm (4.33"); 130 mm (5.12"); 288 mm (11.34"); 6.8 kg (15 lbs.)

Weight (Net): 6.8 kg (15 lbs.)

* Measured pursuant to Federal Trade Commission's Trade Regulation rule on Power Output Claims for Amplifier in U.S.A.

Note: Kenwood follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.

- 25A850
- 25A921
- 25A872
- 25A921
- 25B560MP
- 25C828A
- 25C1735
- 25C1775
- 25C1980
- 25D438MP
- 25C945
- 25C1775
- 25C1980
- 25D438MP
- 25C1904
- 25D883
- 25B773
- 25D883
- NJM4558D
- HA1457

