CONFIDENTIAL



Technical Tip

Date: May 24, 2006

Date. May

Model: DTR-4.6/5.6/6.6/7.6

Subject: Remote and Wired remote does not respond well to input commands


Symptom: When using remote or an external IR controller connected to the rear panel IR input the set may not respond properly to IR commands.

Solution: Install the IR Shield PC Board as described. Cover the IR Remote Sensor.



- 1.) Solder the Terminal Connector to the PC board.
- 2.) Attach the PCB you assembled to the set using a self tapping screw.

CONFIDENTIALITY NOTICE:

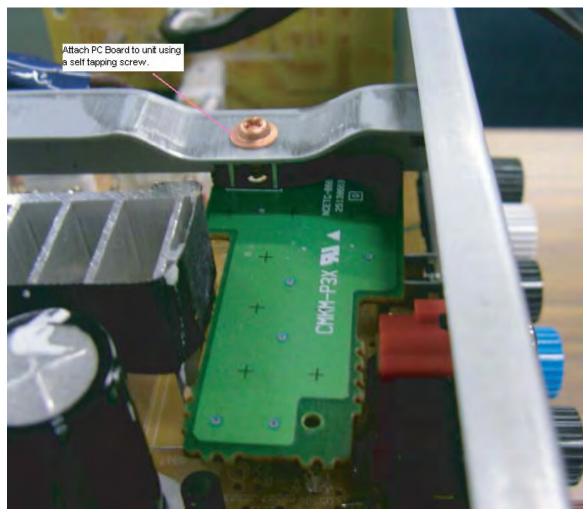

Parts:

Ref#	Description	Part Number
NA	Solder Terminal	25060312
NA	PC Board NCETC-8663	25138663
NA	Self Tapping Screw	831430088

CONFIDENTIALITY NOTICE: