


SCHEMATIC DIAGRAM

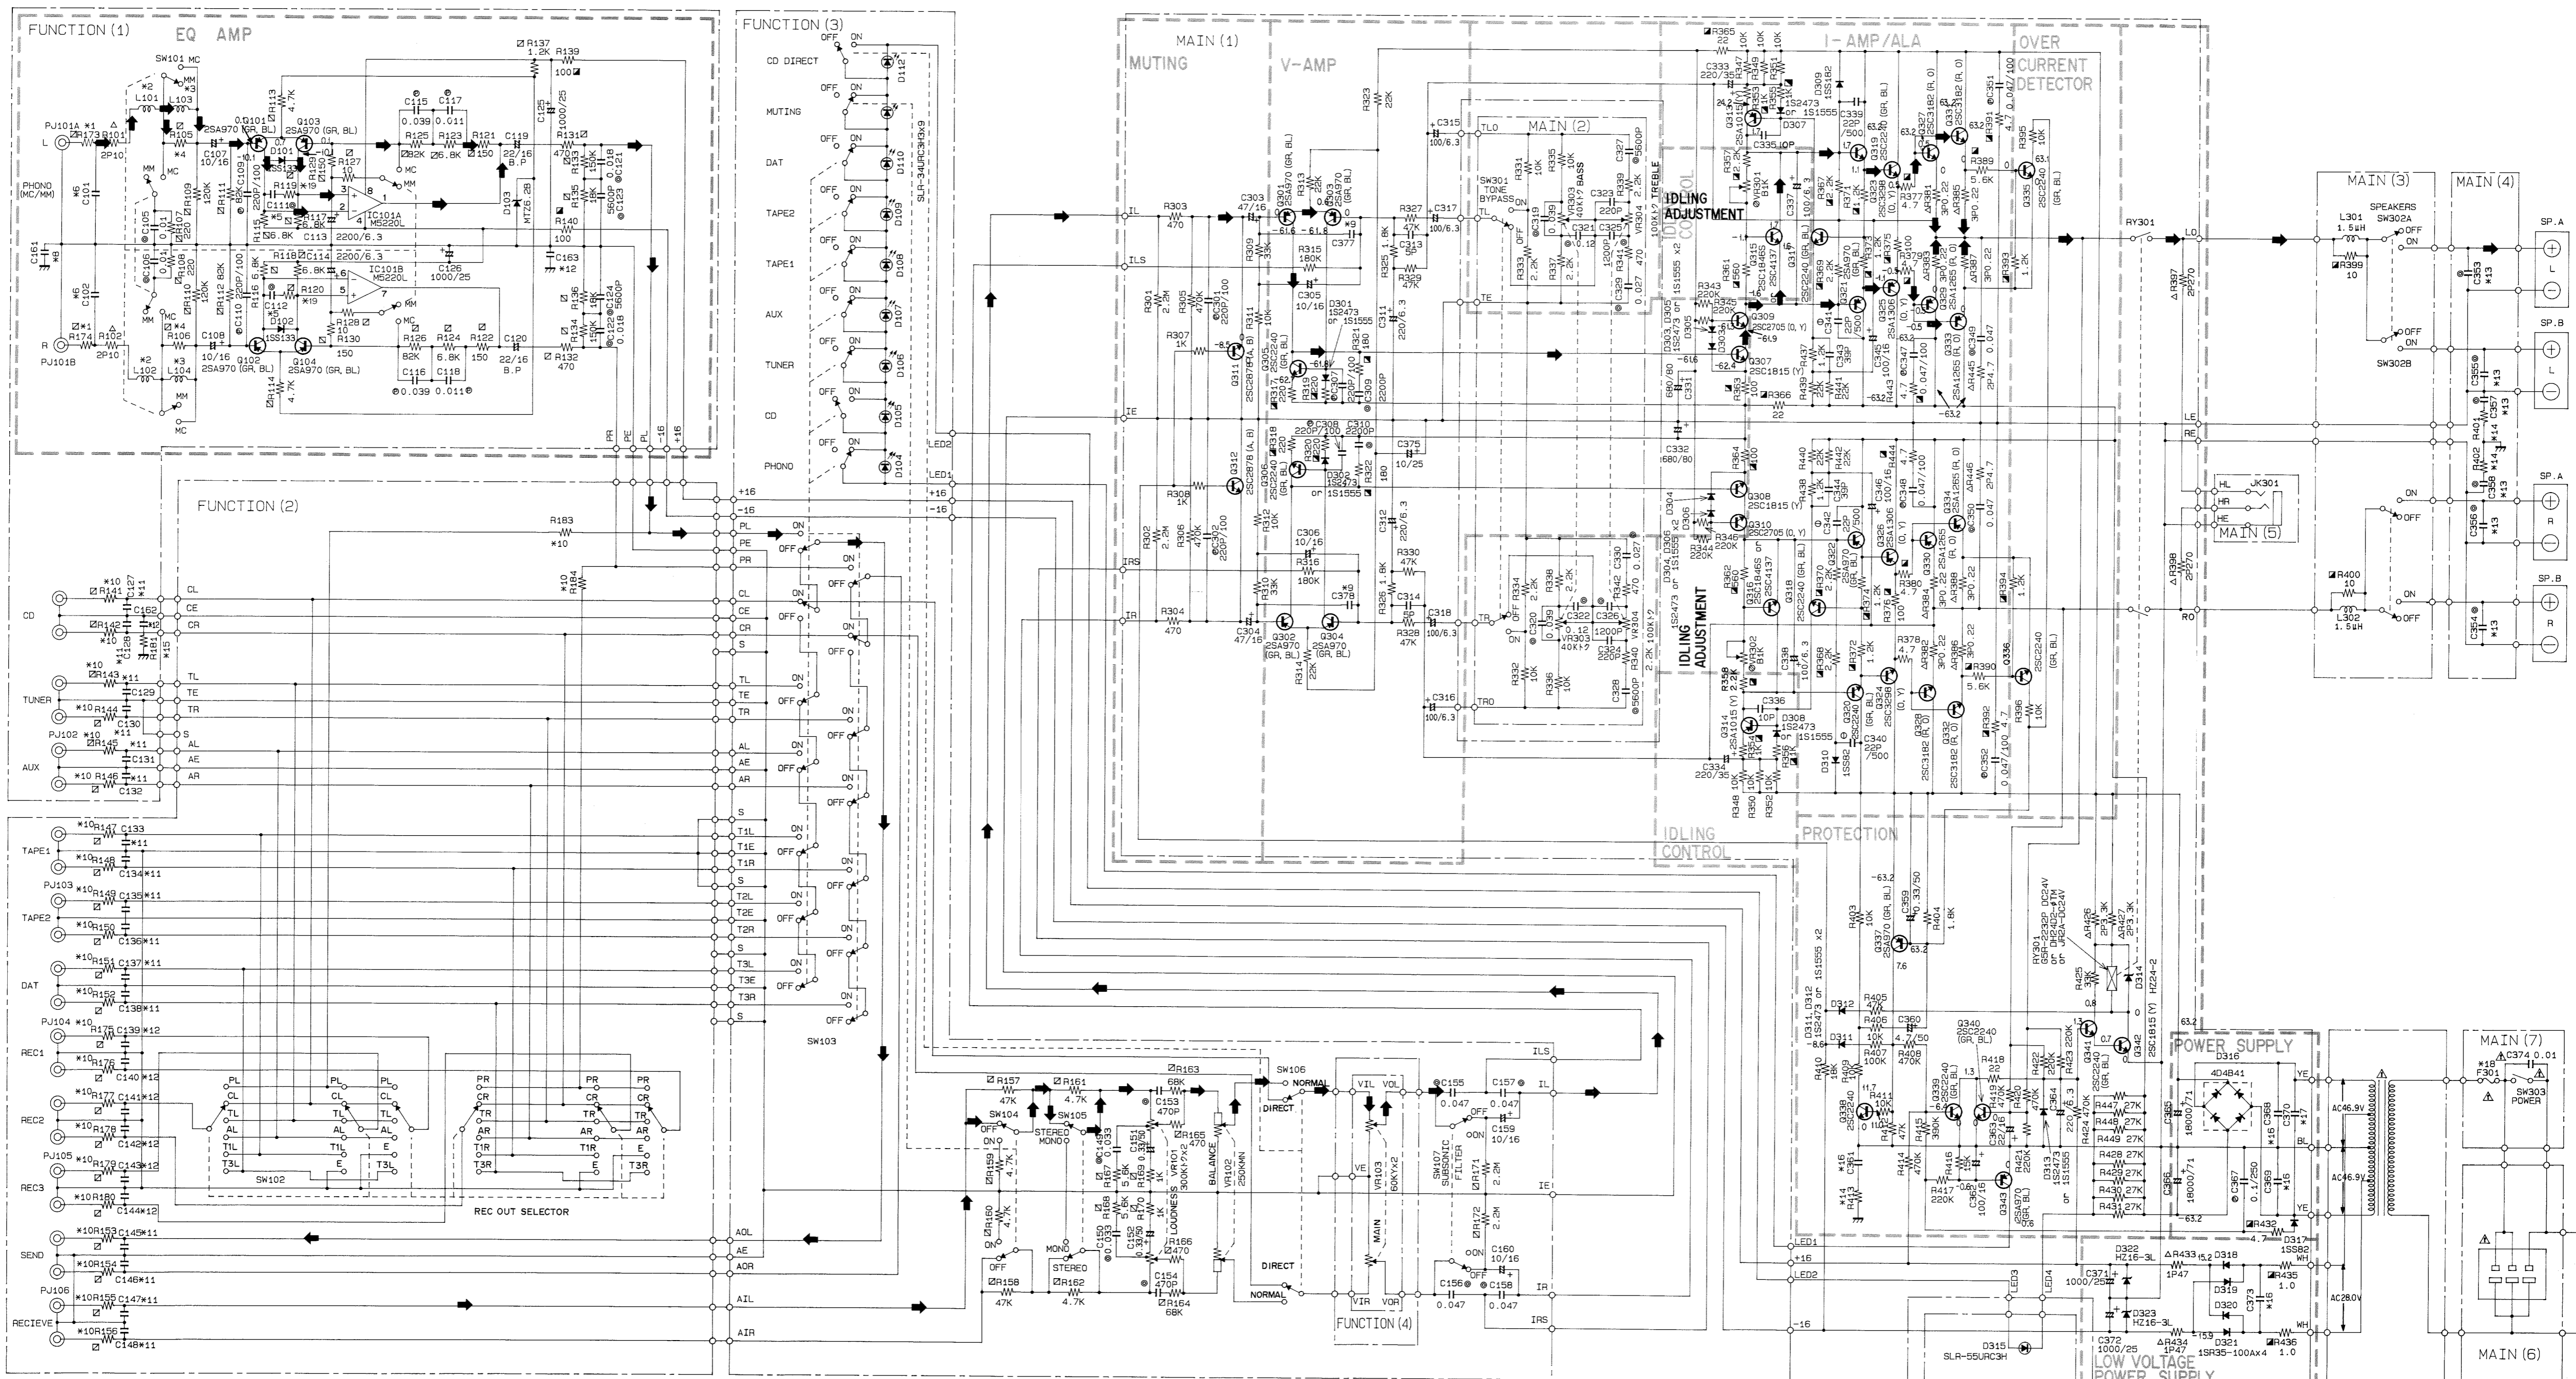

	R	U, C	A	B, G
*1	SHORT			22
*2	SHORT			15 uH
*3	OPEN			470 uH
*4	33			4.7K
*5	@1500P			@2700P
*6	OPEN			@150P/100
*8	OPEN			0.01
*9	OPEN			150P
*10	SHORT			220

	R	U, C	A	B, G
*11	OPEN			220P
*12	OPEN			470P
*13	OPEN			@ 0.01
*14	OPEN			10
*15	OPEN			4.7
*16	OPEN			0.1/250
*17	0.1/250			OPEN
*18	10A 250V			14.0A 250V
*19	100			180

RESISTOR


REMARKS	PARTS NAME
NO MARK	CARBON FILM RESISTOR
□	CARBON FILM RESISTOR (1/6W)
△	METAL OXIDE FILM RESISTOR
○	METAL FILM RESISTOR
⊠	METAL PLATE RESISTOR
■	FIRE PROOF CARBON FILM RESISTOR
□	SEMENT MOLDED RESISTOR
⊙	SEMI VARIABLE RESISTOR

CAPACITOR

REMARKS	PARTS NAME
NO MARK	ELECTROLYTIC CAPACITOR
NO MARK	CERAMIC CAPACITOR
⊙	POLYESTER FILM CAPACITOR
○	POLYSTYRENE FILM CAPACITOR
⊕	MICA CAPACITOR
⊖	POLYPROPYLENE FILM CAPACITOR
●	SEMICONDUCTIVE CERAMIC CAPACITOR

IC BLOCK

IC101: M5220L (Dual Low-Noise Pre-Amp.)

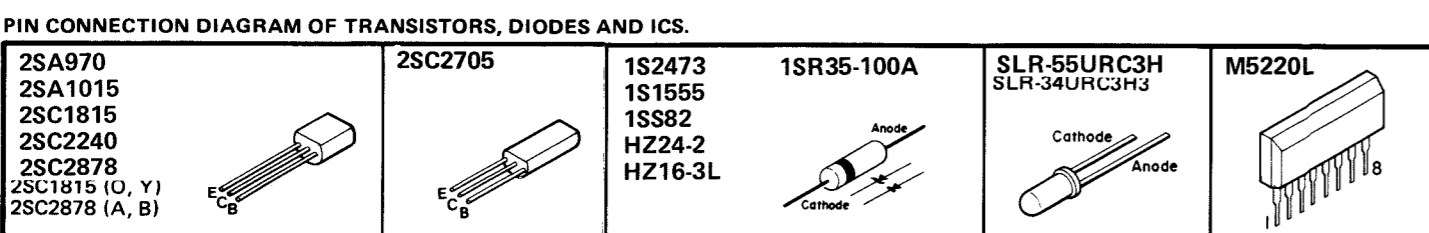

\* All voltages are measured with a 10MΩ/DC electric volt meter.  
 \* Components having special characteristics are marked with a triangle and must be replaced with parts having specifications equal to those originally installed.  
 \* Schematic diagram is subject to change without notice.